




Conductor	Stranded (class 2) Plain annealed copper wires sector shaped for 50 mm ² and above
Color Code Options :	
EN/BSI/IEC	BSI
VDE/IEC	
Insulation	PVC
Inner Covering (Filler)	Extruded PVC (for round shaped conductor) and yarns & Binder Tape for sector shaped ones.
Over-Sheath	Extruded PVC

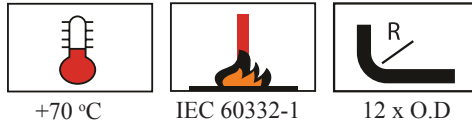

Nominal cross section area of conductor	Insulation Thickness	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	Kg/Km	meter
4x1.5 rm	0.8	1.8	12.5	236	1000
4x2.5 rm	0.8	1.8	13.5	297	1000
4x4 rm	1.0	1.8	16.2	442	1000
4x6 rm	1.0	1.8	17.5	559	1000
4x10 rm	1.0	1.8	19.8	787	1000
4x16 rm	1.0	1.8	22.7	1,124	1000
4x25 rm	1.2	1.8	26.9	1,620	1000
4x35 rm	1.2	1.8	28.3	1,990	1000
4x50 sm	1.4	1.9	28.8	2,393	500
4x70 sm	1.4	2.1	32.4	3,214	500
4x95 sm	1.6	2.2	37.0	4,284	500
4x120 sm	1.6	2.4	40.5	5,295	500
4x150 sm	1.8	2.5	44.9	6,570	500
4x185 sm	2.0	2.7	49.6	8,070	500
4x240 sm	2.2	2.9	55.7	10,358	250
4x300 sm	2.4	3.1	61.8	12,851	250
4x400 sm	2.6	3.4	69.3	16,601	250

Power Cables