

Conductor	Stranded (class 2) Plain annealed copper wires 35 mm ² and above compacted conductor
-----------	--


Color Code Options :



Insulation	XLPE
------------	------

Inner Covering (Filler)	Extruded PVC (for round shaped conductor) and yarns & Binder Tape for sector shaped ones.
-------------------------	---

Over-Sheath	Extruded PVC
-------------	--------------

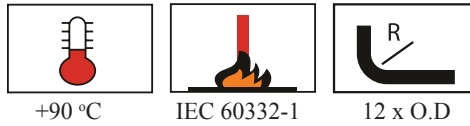

Nominal cross section area of conductor	Insulation Thickness	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	Kg/Km	meter
5x1.5 rm	0.7	1.8	12.9	239	1000
5x2.5 rm	0.7	1.8	14.0	315	1000
5x4 rm	0.7	1.8	15.9	439	1000
5x6 rm	0.7	1.8	17.4	571	1000
5x10 rm	0.7	1.8	19.9	837	1000
5x16 rm	0.7	1.8	23.2	1,226	1000
5x25 rm	0.9	1.8	27.8	1,806	1000
5x35 rm	0.9	1.8	29.4	2,271	500
5x50 rm	1.0	2.0	33.9	3,158	500
5x70 rm	1.1	2.1	39.3	4,310	500
5x95 rm	1.1	2.3	44.4	5,733	500
5x120 rm	1.2	2.5	49.4	7,170	500
5x150 rm	1.4	2.6	54.7	8,859	500
5x185 rm	1.6	2.8	60.9	10,921	250
5x240 rm	1.7	3.0	68.3	5,442	250
5x300 rm	1.8	3.2	75.3	17,395	250