


Conductor	Stranded (class 2) Plain annealed copper wires sector shaped for 50 mm ² and above
------------------	---

Color Code Options :



Insulation	PVC
Inner Covering (Bedding)	Extruded PVC
Armour	Galvanized Steel Wires
Over-Sheath	Extruded PVC

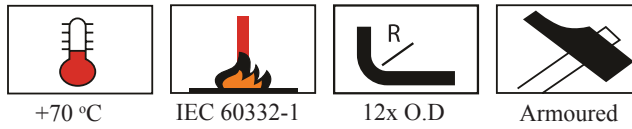

Nominal cross section area of conductor	Insulation Thickness	Diameter Under Armour	Armour Wire Diameter	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	mm	mm	Kg/Km	meter
2x1.5 rm	0.8	8.4	0.9	1.8	13.8	367	1000
2x2.5 rm	0.8	9.2	0.9	1.8	14.6	422	1000
2x4 rm	1.0	11.1	0.9	1.8	16.5	539	1000
2x6 rm	1.0	12.2	1.25	1.8	18.3	736	1000
2x10 rm	1.0	14.1	1.25	1.8	20.2	915	1000
2x16 rm	1.0	16.2	1.25	1.8	22.3	1,151	1000
2x25 rm	1.2	19.6	1.6	1.8	26.4	1,691	1000
2x35 rm	1.2	20.8	1.6	1.8	27.6	1,929	1000
2x50 sm	1.4	21.3	1.6	1.9	28.3	2,070	1000
2x70 sm	1.4	24.4	2.0	2.0	32.4	2,827	500
2x95 sm	1.6	28.4	2.0	2.2	36.8	3,593	500
2x120 sm	1.6	31.2	2.0	2.3	39.8	4,230	500
2x150 sm	1.8	34.6	2.5	2.4	44.4	5,419	500
2x185 sm	2.0	38.5	2.5	2.6	48.7	6,415	500
2x240 sm	2.2	43.3	2.5	2.8	53.9	7,863	500
2x300 sm	2.4	48.3	2.5	2.9	59.1	9,440	500
2x400 sm	2.4	54.7	2.5	3.1	65.9	11,820	250