


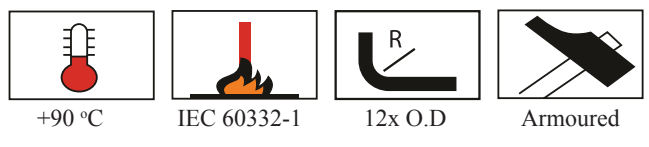


Conductor	Stranded (class 2) Plain annealed copper wires sector shaped for 50 mm ² and above	
Color Code Options :		
		
EN/BSI/IEC	BSI	VDE/IEC
Insulation	XLPE	
Inner Covering (Bedding)	Extruded PVC	
Armour	Galvanized Steel Wires	
Over-Sheath	Extruded PVC	



Nominal cross section area of conductor	Insulation Thickness	Diameter Under Armour	Armour Wire Diameter	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	mm	mm	Kg/Km	meter
3x25/16 rm	0.9	20.8	1.6	1.8	27.6	2,028	1,000
3x35/16 rm	0.9	21.8	1.6	1.8	28.6	2,340	1,000
3x50/25 sm/rm	1.0	24.0	1.6	1.9	31.0	2,906	500
3x70/35 sm	1.1	27.9	2.0	2.1	36.1	4,061	500
3x95/50 sm	1.1	31.2	2.0	2.2	39.6	5,063	500
3x120/70 sm	1.2	34.6	2.0	2.4	43.4	6,206	500
3x150/70 sm	1.4	39.0	2.5	2.5	49.0	7,818	500
3x185/95 sm	1.6	43.1	2.5	2.7	53.5	9,357	500
3x240/120 sm	1.7	48.5	2.5	2.9	59.3	11,625	250
3x300/150 sm	1.8	53.5	2.5	3.0	64.5	13,965	250