


Conductor	Stranded (class 2) Plain annealed copper wires sector shaped for 50 mm ² and above
------------------	---

Color Code Options :



Insulation	PVC
Inner Covering (Bedding)	Extruded PVC
Armour	Galvanized Steel Tapes
Over-Sheath	Extruded PVC

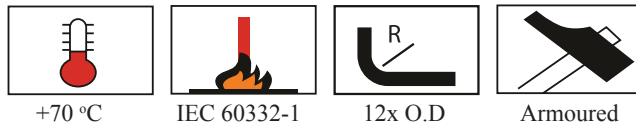

Nominal cross section area of conductor	Insulation Thickness	Diameter Under Armour	Armour Tape Thickness	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	mm	mm	Kg/Km	meter
2x1.5 rm	0.8	8.8	0.2	1.8	13.2	275	1000
2x2.5 rm	0.8	9.6	0.2	1.8	14.0	320	1000
2x4 rm	1.0	11.5	0.2	1.8	15.9	419	1000
2x6 rm	1.0	12.6	0.2	1.8	17.0	499	1000
2x10 rm	1.0	14.5	0.2	1.8	18.9	649	1000
2x16 rm	1.0	16.6	0.2	1.8	21.0	848	1000
2x25 rm	1.2	20.0	0.2	1.8	24.4	1,171	1000
2x35 rm	1.2	21.2	0.2	1.8	25.6	1,382	1000
2x50 sm	1.4	21.3	0.2	1.8	25.7	1,504	1000
2x70 sm	1.4	24.4	0.2	1.9	29.0	1,960	1000
2x95 sm	1.6	28.4	0.2	2.0	33.2	2,580	500
2x120 sm	1.6	31.2	0.5	2.2	37.6	3,528	500
2x150 sm	1.8	34.6	0.2	2.3	40.0	3,836	500
2x185 sm	2.0	38.5	0.2	2.4	44.1	4,674	500
2x240 sm	2.2	43.3	0.2	2.6	49.3	5,965	500
2x300 sm	2.4	48.3	0.5	2.8	55.9	7,873	500
2x400 sm	2.6	55.2	0.5	3.1	63.4	10,039	250