

Conductor	Stranded (class 2) Plain annealed copper wires 35 mm ² and above compacted conductor
------------------	--

Color Code Options :




Insulation	PVC
-------------------	-----

Inner Covering (Bedding)	Extruded PVC
---------------------------------	--------------

Armour	Galvanized Steel Tapes
---------------	------------------------

Over-Sheath	Extruded PVC
--------------------	--------------

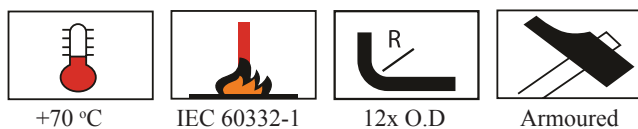

Nominal cross section area of conductor	Insulation Thickness	Diameter Under Armour	Armour Tape Thickness	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	mm	mm	Kg/Km	meter
5x1.5 rm	0.8	11.0	0.2	1.8	15.4	394	1000
5x2.5 rm	0.8	12.2	0.2	1.8	16.6	477	1000
5x4 rm	1.0	13.9	0.2	1.8	18.3	628	1000
5x6 rm	1.0	16.2	0.2	1.8	20.6	805	1000
5x10 rm	1.0	18.7	0.2	1.8	23.1	1,100	1000
5x16 rm	1.0	21.6	0.2	1.8	26.0	1,499	1000
5x25 rm	1.2	26.2	0.2	1.8	30.6	2,130	500
5x35 rm	1.2	27.8	0.2	1.9	32.4	2,610	500
5x50 rm	1.4	32.1	0.2	2.1	37.1	3,560	500
5x70 rm	1.4	36.7	0.5	2.2	43.1	5,163	500
5x95 rm	1.6	42.5	0.5	2.5	49.5	6,822	500
5x120 rm	1.6	42.5	0.5	2.6	49.7	8,010	500
5x150 rm	1.8	51.9	0.5	2.8	59.5	10,200	250
5x185 rm	2.0	57.5	0.5	3.0	65.5	12,345	250
5x240 rm	2.2	65.4	0.5	3.3	74.0	15,763	250