


Conductor	Stranded (class 2) Plain annealed copper wires sector shaped for 50 mm <sup>2</sup> and above
Color Code Options :	
EN/BSI/IEC	BSI
VDE/IEC	
Insulation	XLPE
Inner Covering (Bedding)	Extruded PVC
Armour	Galvanized Steel Tapes
Over-Sheath	Extruded PVC

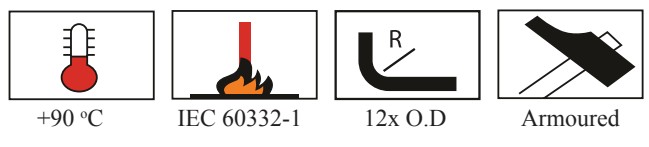

Nominal cross section area of conductor	Insulation Thickness	Diameter Under Armour	Armour Tape Thickness	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm <sup>2</sup>	mm	mm	mm	mm	mm	Kg/Km	meter
3x25/16 rm	0.9	21.2	0.2	1.8	25.6	1,490	1,000
3x35/16 rm	0.9	22.2	0.2	1.8	26.6	1,776	1,000
3x50/25 sm/rm	1.0	24.4	0.2	1.9	29.0	2,293	500
3x70/35 sm	1.1	27.9	0.2	2.0	32.7	3,072	500
3x95/50 sm	1.1	31.2	0.5	2.2	37.6	4,387	500
3x120/70 sm	1.2	34.8	0.5	2.3	41.4	5,437	500
3x150/70 sm	1.4	38.8	0.5	2.5	45.8	6,502	500
3x185/95 sm	1.6	43.1	0.5	2.6	50.3	7,951	500
3x240/120 sm	1.7	48.5	0.5	2.8	56.1	10,026	500
3x300/150 sm	1.8	53.5	0.5	3.0	61.5	12,235	250