


Conductor	Stranded (class 2) Plain annealed copper wires 35 mm ² and above compacted conductor
Color Code Options :	
EN/BSI/IEC	BSI
VDE/IEC	
Insulation	XLPE
Inner Covering (Bedding)	Extruded PVC
Armour	Galvanized Steel Tapes
Over-Sheath	Extruded PVC

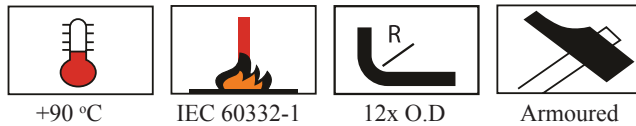

Nominal cross section area of conductor	Insulation Thickness	Diameter Under Armour	Armour Tape Thickness	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	mm	mm	Kg/Km	meter
5x1.5 rm	0.7	10.5	0.2	1.8	14.9	357	1,000
5x2.5 rm	0.7	11.6	0.2	1.8	16.0	436	1,000
5x6 rm	0.7	14.6	0.2	1.8	19.0	700	1,000
5x10 rm	0.7	17.1	0.2	1.8	21.5	976	1,000
5x16 rm	0.7	20.0	0.2	1.8	24.4	1,354	1,000
5x25 rm	0.9	24.6	0.2	1.8	29.0	1,979	1,000
5x35 rm	0.9	24.6	0.2	1.9	29.2	2,362	500
5x50 rm	1.0	29.9	0.2	2.1	34.9	3,294	500
5x70 rm	1.1	35.1	0.5	2.2	41.5	4,876	500
5x95 rm	1.1	39.6	0.5	2.4	46.4	6,323	500
5x120 rm	1.2	44.4	0.5	2.6	51.6	7,836	500
5x150 rm	1.4	49.7	0.5	2.7	57.1	9,606	500
5x185 rm	1.6	55.3	0.5	2.9	63.1	11,714	250
5x240 rm	1.7	62.5	0.5	3.2	70.9	14,898	250
5x240 rm	2.2	65.4	0.5	3.3	74.0	15,763	250