


Conductor	Stranded (class 2) Plain annealed copper wires sector shaped for 50 mm ² and above
------------------	---

Color Code Options :



Insulation	PVC
Inner Covering	Extruded PVC
Metal Sheath	Lead Sheath (Cover)
Inner Covering (Bedding)	Extruded PVC
Armour	Galvanized Steel Wires
Over-Sheath	Extruded PVC

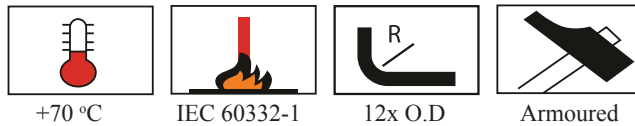

Nominal cross section area of conductor	Diameter Under Armour	Armour Wire Diameter	Diameter Over Lead Sheath	Lead Sheath Thickness	Sheath thickness	Overall Diameter	Weight	Standard Packing Length
mm ²	mm	mm	mm	mm	mm	mm	Kg/Km	meter
3x25/16 rm	26.8	1.6	24.8	1.3	1.9	33.8	3,533	500
3x35/16 rm	28.1	2.0	25.9	1.3	2.0	36.1	4,183	500
3x50/25 sm/rm	31.0	2.0	28.6	1.4	2.2	39.4	5,149	500
3x70/35 sm	34.7	2.0	32.3	1.5	2.3	43.3	6,378	500
3x95/50 sm	39.3	2.5	36.7	1.6	2.5	49.3	8,397	500
3x120/70 sm	43.0	2.5	40.2	1.7	2.7	53.4	10,003	500
3x150/70 sm	47.4	2.5	44.4	1.8	2.8	58.0	11,586	250
3x185/95 sm	52.0	2.5	48.8	1.9	3.0	63.0	13,829	250
3x240/120 sm	58.4	2.5	55.0	2.1	3.2	69.8	17,126	250